
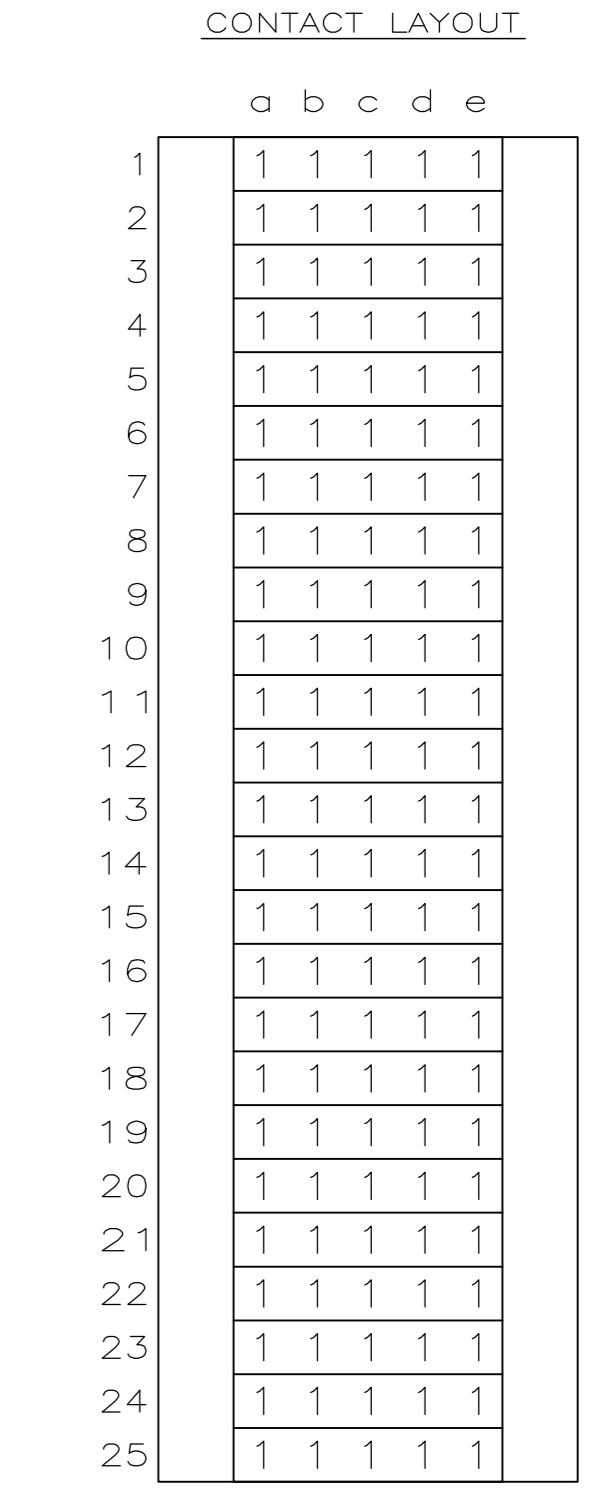


RECOMMENDED PCB-HOLE LAY-OUT
COMPONENT SIDE SHOWN

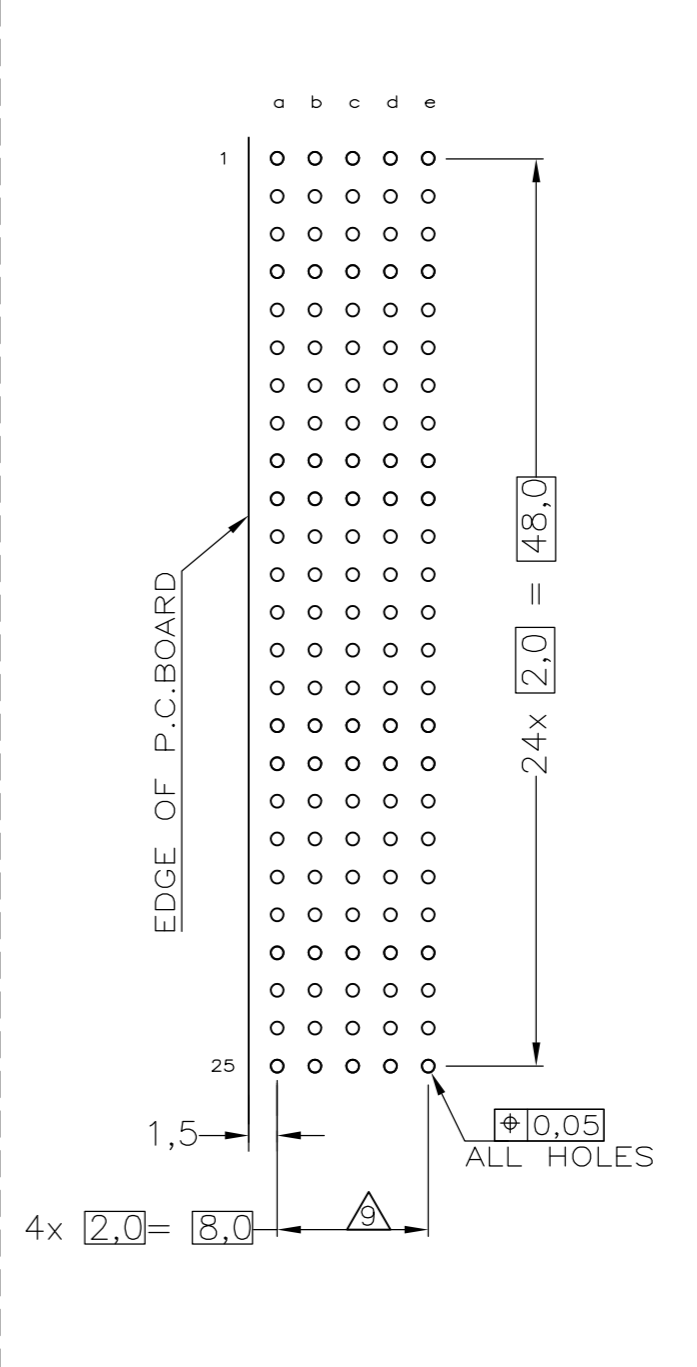

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

- NOTES:
- MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING V0
CONTACT : PHOSPHORBRONZE
 - GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.
AND ACTION PIN: 0,5µm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
 - CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - CONNECTOR MARKED WITH PARTNUMBER AND DATECODE
 - PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		L3		REVISED PER ECR-11-023696	01DEC2011	A.S	M.W

Y	△	△△	1-106014-9
N		△△	1-106014-1 △
Y	△	△△	106014-9
N		△△	106014-4
N		△△	106014-1
OBSOLETE			
CONSERVATION TREATMENT		CONTACT FINISH	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 0.2 3 PLC ± 0.2 4 PLC ± 0.2 ANGLES ± -	DWN 15DEC97 L.v.d.HEIJDEN CHK 15DEC97 D. TRUREN APVD - F.v.KONINGSBRUGGE PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029	NAME TE Connectivity Z-PACK 2MM HM TYPE B 125 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY
MATERIAL	FINISH	WEIGHT - CUSTOMER DRAWING	SIZE A2 CAGE CODE 00779 DRAWING NO. C=106014 RESTRICTED TO -
		SCALE NTS	SHEET 1 OF 1 REV L3